


# MODEL: 12N6.5L-BS



Container Optional Color  
 ■ Black C

## Plane Chart:

Unit:(mm) Terminal type:( C1 )

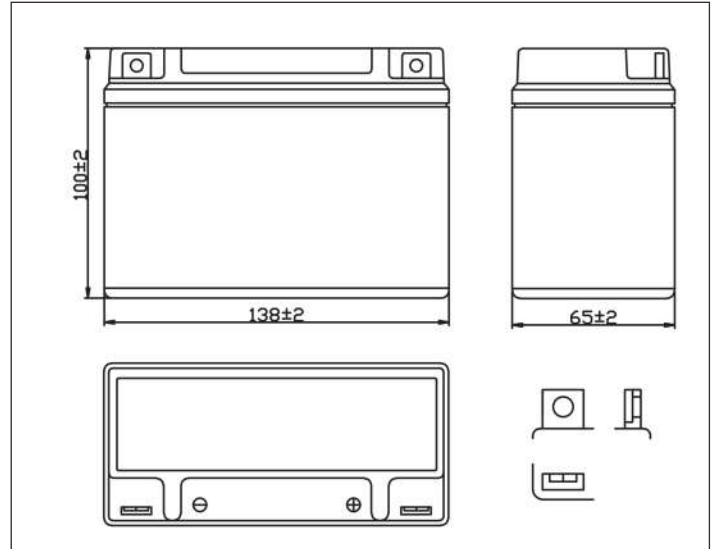

## Parts:

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safty Valve	Seal Glue
ABS	ABS	Pb	PbO2	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin

## Parameter Chart:

Volts	12V	
Capacity (25°C)	10 hours rate	6.5Ah
Appx.Dimension (mm)	L±2	138
	W±2	65
	H±2	100
Storage Status	Wet	
Weight (Approx)	1.9kg	

### Retention of Charge Storage @25 C


1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Constant Volts:14.4V Limit Current:1.3A Charging Hours:2-3H
12 month	40%	Constant Volts:14.4V Limit Current:1.3A Charging Hours:4-6H

Packaging	Payment	Lead Time
PVC/Colored boxes	TT, D/P, LC,OA, etc.	20-25 Working Days

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.

## Discharge Current 25°C

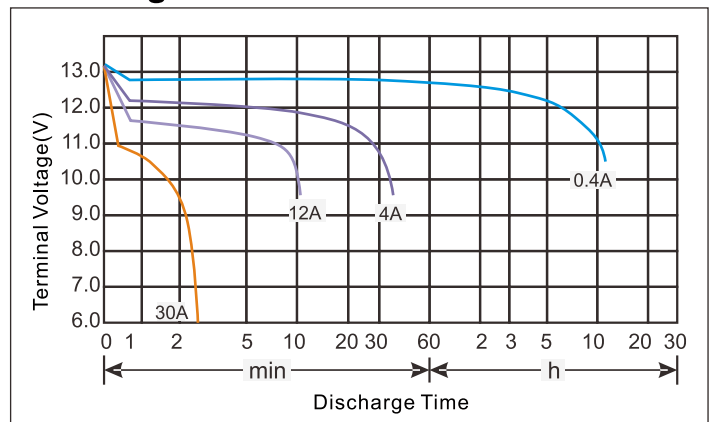

## Residual Capacity

