

LDC12-24

FEATURES&BENEFITS

- True deep cycle AGM-GEL technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte + Gel for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration :long cycle life &High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
12	/	24.0	23.0	22.0	21.0	/	/	/



PHYSICAL SPECIFICATIONS

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
181/7.13	76.5/3.01	171/6.73	171/6.73	6.85/15.1	T15(M5)	ABS


Operating Temperature Range		
Discharge	Charge	Storage
-20°C~55°C(-4°F~131°F)	0°C~40°C(32°F~104°F)	-15°C~40°C(5°F~104°F)

Specifications subject to change without notice.

DIMENSIONS

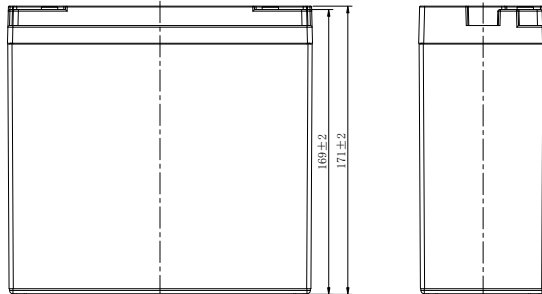


Terminal




Note: Terminal Torque Values in-lb(Nm):17.69-26.53(2.0-3.0)

PERFORMANCE CHARACTERISTICS


Charging Profile

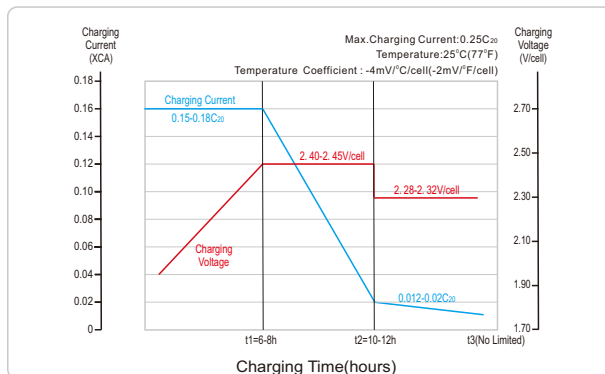


Relationship of OCV and State Of Charge (25°C, 77°F)

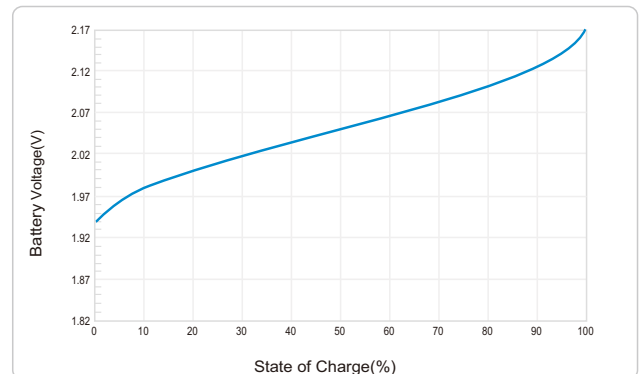

Cycle Life in Relation to Depth Of Discharge

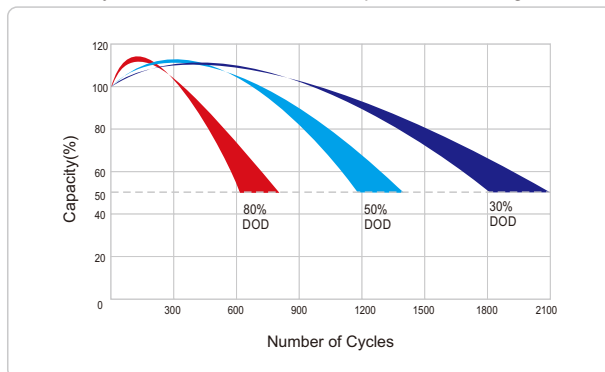

Self-discharge Characteristic

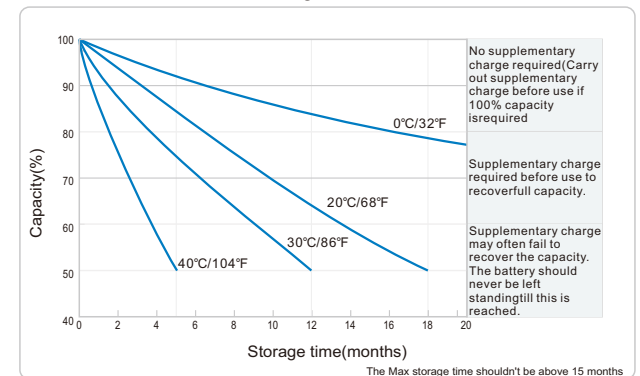

Sales Office

Specifications subject to change without notice.



ZAFER ENERGY SYSTEMS IND.&FOREIGN TRADE CO.LTD.

Head Office

BEYLİKDUZU O.S.B MERMERCİLER SAN SİT. 9. CAD. NO:18

BEYLİKDUZU/İSTANBUL

TEL : +90(212)632 77 75

FAX : +90(212)632 05 87

WEB : <http://www.zaferenergy.com>