

# Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery

## LFELI-12100M (12.8V100Ah)

### Features Of LiFePO<sub>4</sub> Battery

**Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

**Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.


**Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

**Wider Temperature Range:** -20°C~60°C.

**Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.



### Physical Dimension-mm

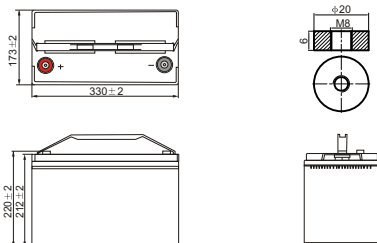

### Typical Applications

- Wheelchairs and scooters
- Solar/wind energy storage
- Back-up power for small UPS
- Golf trolleys & buggies
- Electric bikes
- Tools

### Specification


Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	100Ah
	Energy	1280Wh
	Internal Resistance(AC)	≤20mΩ
	Cycle Life	>2000 cycles @1C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @0.5C
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode	0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV)
	Charge Current	50A
	Max. Charge Current	100A
	Charge Cut-off Voltage	14.6V±0.2V
Standard Discharge	Rated Discharge Current	50A
	Max. Discharge Current	100A
	Discharge Cut-off Voltage	10V
Environmental	Charge Temperature	0 °C to 55 °C (32F to 131F) @60±25% Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	-20 °C to 45 °C (-4F to 113F) @60±25% Relative Humidity
	IP Class	IP65
Mechanical	Plastic Case	ABS
	Approx. Dimensions	330mm*173mm*220mm (12.99in.*6.81in.*8.66in.)
	Approx. Weight	13.10kg (28.66lbs)
	Terminal	M8

Specifications subject to change without notice.


# Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery

## LiFeLi-12100M (12.8V100Ah)


**Different Rate Discharge Curve(25°C)**

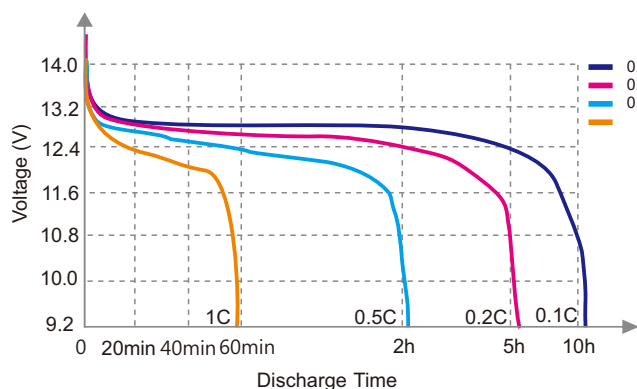


**Different Temperature Discharge Curve(0.5C)**

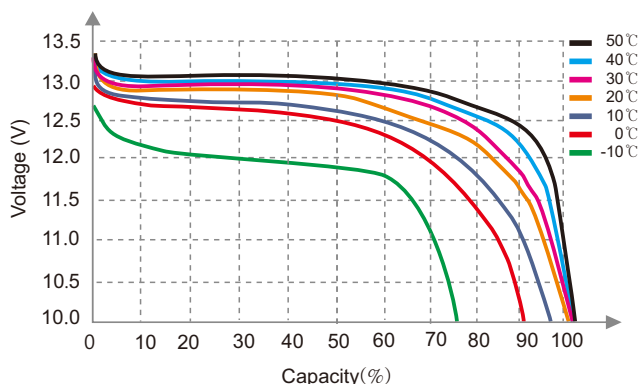


**State of Charge Curve(0.5C, 25°C)**

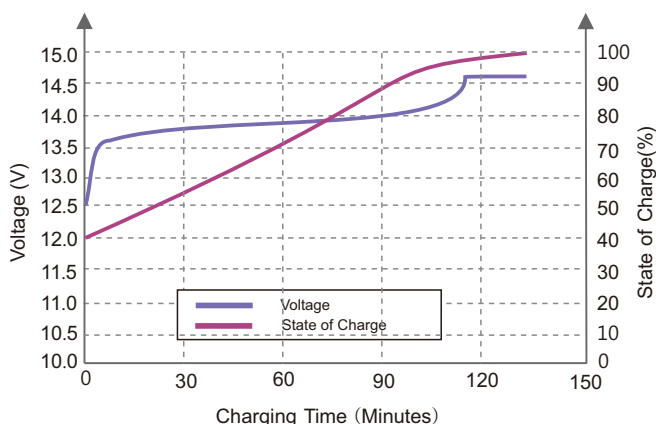


**Charging Characteristics(0.5C, 25°C)**

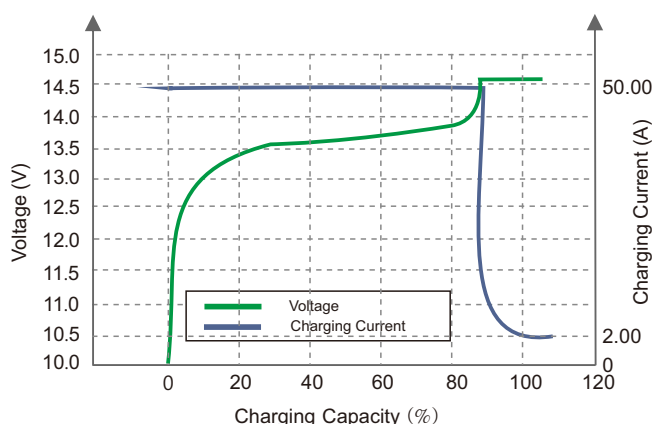

**Different DOD Discharge Cycle Life Curve(1C)**

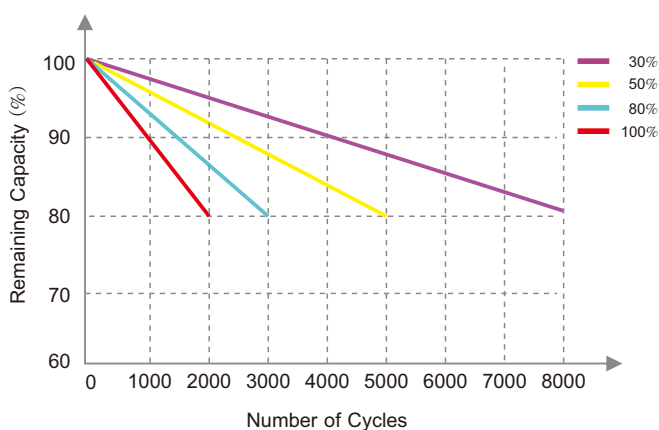

**Different Temperature Self Discharge Curve**

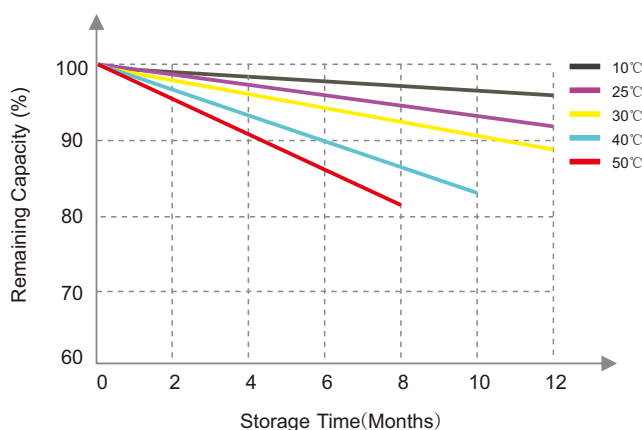

**Sales Office**

Specifications subject to change without notice.



**ZAFER ENERGY SYSTEMS IND.&FOREIGN TRADE CO.LTD.**

**Head Office**

Beylikdüzü O.S.B Mermerciler San. Sitesi  
9. Cadde No:18 Beylikdüzü  
ISTANBUL/TURKEY  
TEL : +90(212)632 0535  
FAX : +90(212)632 0587  
WEB : <http://www.zaferbattery.com>